Construction trailers 13t - 25t Classic or dumper

ATP / BT Range

ATP 13 / ATP 16 / ATP 20 / BT 18/25







	EQUIPMENT	ATP 13	ATP 16	ATP 20
НІТСН	Drawbar adjustable in height	•	•	
	Drawbar with sprung suspension adjustable in heigh t			•
	Drawbar with hydraulic suspension adjustable in height	0	0	0
	Hydraulic crutch with hand pump	•	•	•
	Ø50mm ring on Scharmüller universal plate	0	0	•
	Ø80mm ball on Scharmüller universal plate	0	0	0
UNDER	Heavy-duty boggie axles	•	•	
CARRIAGE	Heavy-duty tandem axles with adjustment of parallelism			•
0-0	Passive steering rear axle	0	0	0
	Axles mounted on boggie			0
	Poclain hydraulic assistance on axles (2WD or 4WD)	0	0	0
	Parabolic suspension leaves	•	•	•
	Hydraulic braking	•	•	•
	Emergency brake by nitrogen ball ²			•
	Mixed hydraulic and air braking	0	0	0
	25 km/h homologation	•	•	•
	Air braking (40 km/h homologation)			0
	Other set of tyres: consult us	0	0	0
BODY /	On-demand RAL color (special painting applied in factory)	0	0	0
LIGHTING	Body sloted into chassis with resting on silent blocks	•	•	•
Ä	Chassis made of wear-resistent PEB (Pre Engineered Buildings) steel	•	•	•
	Semi-conical half-round body made of HARDOX®450 steel	•	•	•
	HARDOX® 450 bottom, thickness 5mm (ATP 13-16) / 6mm (ATP 20)	•	•	•
	HARDOX® 450 sides, thickness 4mm (ATP 13-16) / 5mm (ATP 20)	•	•	•
	Rocks breaker profile on upper sides	•	•	•
	Removable hitch protection front cap	0	0	•
	One-piece mudguards	0	0	•
	Lateral slidding ladder	•	•	•
	1-panel door with hydraulic opening	•	•	•
	2-panel door with hydraulic opening	0	0	0
	Set of electric wires protected into chassis	•	•	•
	Double LED lights with protection grid	•	•	•
DUMPING	Dumping by telescopic cylinder on tractor valves	•	•	•
	Cylinder mounted on frame and ball connection for a lifetime excellence			•
E - 0-0	Load transfer cylinder on rear axle (on boggie axles only)	0	0	0


• standard O option -- not available


COMPATIBLE TYRES available as option						
	ATP 13	ATP 16	ATP 20			
425/65 R22,5 Rech	0					
445/65 R22,5 Neuf	0	0				
560/60 R22,5 ALLIANCE A380	0	0	0			
560/60 R22,5 ALLIANCE A390			0			
560/60 R22,5 ALLIANCE A885	0	0	0			
560/60 R22,5 NOKIAN COUNTRY KING / NOKIAN CT / HD CARGO MICHELIN			0			
580/65 R22,5 ALLIANCE A380 / NOKIAN COUNTRY KING			0			
600/55 R26,5 ALLIANCE A380 / ALLIANCE A 390 / NOKIAN CT / HF CARGO MICHELIN			0			




TECHNICAL DATA												
Туре	PL ¹	Volume	Dimensions			Axles			Tyres ²			
			L	W	h	OL	OW	Н	quantity	mounting	brakes	_
	kg	m ³	mm	mm	mm	mm	mm	mm			mmxmm	
ATP 13	13000	9	4700	2300	800	6250	2550	1400	2	boggie	355x80	385/65R22,5
ATP 16	16000	9	4700	2300	800	6250	2550	1400	2	boggie	400x80	445/65R22,5
ATP 20	20000	15	5450	2350	1080	7300	2550	1520	2	tandem	406x140	445/65R22,5
BT 18/25	20000 on road 25000 off-highway	12	5350	2130	1330	7070	2550	1500	2	boggie	420x180	24x20,5 XS


¹ Payload ² other tyres available as option, see table p.2



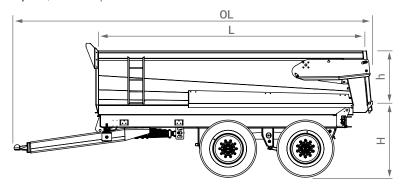

ATP Range
Optimization of your sites



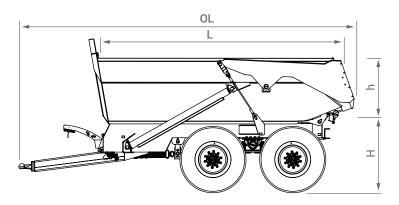

BT RangePower, efficiency and versatility










BT RANGE

The power and efficiency of a dumper, versatility in addition

	EQUIPMENT	BT18/25
HITCH	Sprung drawbar adjustable in height	•
	Drawbar with hydraulic suspension adjustable in height	0
	Hydraulic crutch with hand pump	•
	Ø50mm ring on Scharmüller universal plate	•
	Ø80mm ball on Scharmüller universal plate	0
UNDER.	Road and off-highway homologation	•
CARRIAGE	Axles mounted on special construction boggie with high amplitude	•
0-0	Poclain hydraulic assistance on axles (2WD or 4WD)	0
	Parabolic suspension leaves	•
	Hydraulic braking with heavy-duty brakes	•
	Mixed hydraulic and air brakinging	0
	Air braking (40 km/h homologation)	0
	Other set of tyres : consult us	0
BODY /	'On-demand RAL color (special painting applied in factory)	0
LIGHTING	"Raised rear edge permitting the use without door	•
Ä	Chassis made of highly resilient HSLA steel ¹	•
	HARDOX® 450 bottom, thickness 10mm	•
	SSAB Domex® 500 sides, thickness 10mm	•
	All HARDOX® 450 body	0
	Rocks-breaker profile on upper sides	•
	Door with automatic opening and high amplitude	0
	Set of electric wires protected in steel tube	•
	Double LED lights protected by grid	•
DUMPING	PTO-driven dumping with compressor	•
(2)	Dumper-type high amplitude kinematic	•
E - 0-0	Fast dumping cycle with high-flow distributor	•
	Ball-joint connection on double-acting cylinders for lifetime excellence	•
	Load transfer cylinder on rear axle	0
		

standard O option – not available

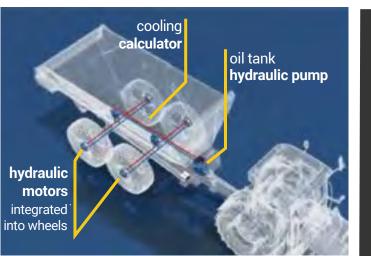

HYDRAULIC
ASSISTANCE
on axles

on axles

Front and rear traction assistance up to 8km/h in 4-wheel drive (4WD) and 16km/h in 2-wheel drive (2WD). Sized for intensive use

¹ High Strength Low Aloy



BT 18/25 with 4WD hydraulic assistance on axles

The hydraulic assistance:

More mobility for a better productivity

The Addidrive® Assist system born from the partnership between Gourdon and Poclain Hydraulics improves crossing and grip capacities by increasing the motor skills of fully loaded towed sets on rough, muddy or sloping fields.

HOW IT WORKS

The driver gives an assistance instruction (front-rear-hold) using the joystick in the cabin and uses the trailer as a "usual" trailer. The system status can be viewed in real time on a monitor placed in the cabin.

The transition from 4WD to 2WD then to 0WD (and vice versa) is automatic, without any intervention from the driver.

Thanks to the holding capacity of the hydraulic assistance, the trajectory & safety of the convoy are also guaranteed.

With Gourdon hydraulic assistance, reach the toughest fields and win new markets throughout the year.

Go where others don't.

PERFORMANCES



FUEL SAVINGS



INCREASE OF THE CARRIED PAYLOAD, WITHOUT INCREASING THE POWER OF THE TOWING TRACTOR



MOVING THE SAME PAYLOAD WITH A LOWER POWER TRACTOR



EXTENSION OF THE RANGE OF USE OF YOUR EQUIPMENT

Turn logistics simple.

Specialized in the manufacturing of trailers for more than 40 years, Gourdon SA is a family business which makes the choice to place its expertise at your disposal to offer smart and quality equipment.



RELIABILITY

Rugged and heavy-duty components, optimized structures and Gourdon patented technologies are as many features that guarantee you a lifetime excellence.

INNOVATION

Key technologies developed by Gourdon to serve your productivity and your safety. Mastered in-house design and production.

COMFORT

Technical, ergonomic and optimized solutions to ease the coupling of the trailer, as well as the loading and the securing of the equipment.

SERVICE

An after-sales service managed by professionals here to advise you. Thanks to your serial number, access the spare parts tool on our website.









GOURDON FRÈRES, PLC with a share capital of 310 000€

2693 route de Geaune, FR – 40800 AIRE SUR L'ADOUR SIREN : 340 806 439 – RCS MONT DE MARSAN

Phone: +33 (0) 5 58 71 65 83

Mail: contact@remorques-gourdon.com
Web: www.remorques-gourdon.com

Find us on:

